


Technical Specifications **PX-IC**



The
Safety Supply
Company

www.thesafetysupplycompany.co.uk

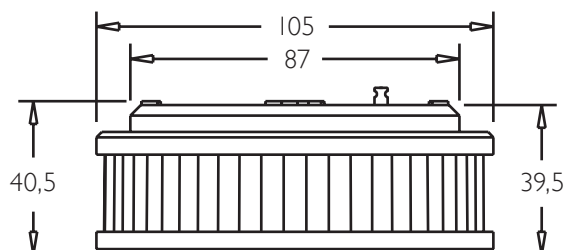

Area of use	DIN EN ISO 9001:2008
Monitoring radius (depending on structural conditions)	Up to 60 m ² capture area / Up to 6 m room height
Battery	2 x 3.0V lithium 2/3 A, firmly soldered
Battery Life	Maximum 10 + 2 years
Audible alarm	>85 dB alarm
Optimum storage temperature	5 to 35° C, <70% rel. humidity
Protection class	IP 40
Colour	White
Material	ABS
Dimensions (H x Ø)	4 x 10 cm
Weight	Approx. 160 g net (without fasteners)
Readable data storage with Export function	✓
Kitchen suitable	✓
Installation	Acrylate foam adhesive pad for screw and adhesive mounting
ADDITIONAL TECHNICAL SPECIFICATION TO RADIO MODULE	
Wireless networking (frequency)	868.3 MHz according to R&TTE Directive
Protocoll	FSK (Frequency Shift Keying)
Networked devices per radio group	Maximum 15
Number of parallel groups	Unlimited (automatic coding via unique serial number)
Radio Range	400 m (± 10%) in the open field
Repeater Function	✓