


## Nitrile disposable gloves that provide confident grip and durable protection

- **Enhanced grip:** Featuring our Mega Texture surface for consistent grip in wet and dry conditions
- **Tear resistance:** Robust 0.13mm/5.1mil palm thickness to resist tearing in use
- **High visibility:** Orange color to increase visibility while working
- **Durable:** Strong formulation providing durable yet comfortable hand protection
- **Food approved:** Ideal for a wide range of food handling applications

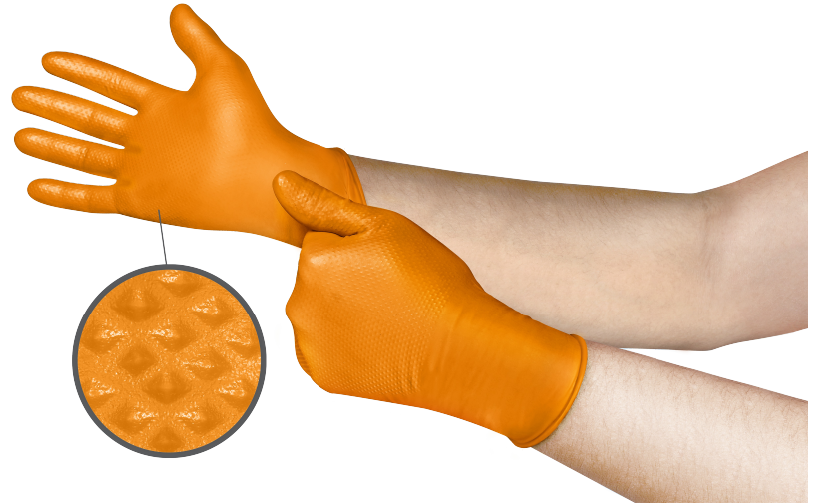

### Industries

- Automotive
- Automotive Aftermarket
- Food Processing
- Machinery and Equipment
- Maintenance
- Manufacturing
- Recycling and Waste Disposal
- Transportation

### Recommended For

- General Purpose Auto Aftermarket
- Food processing and handling
- Oil, fluids and filter change
- Engine transmission and repair
- Mechanical jobs
- Maintenance
- Tire rotation & changes
- Vehicle maintenance
- Assembly of parts

# TECHNICAL DATA SHEET

Product Information	
External Glove Surface	Fully Textured
Audit Standards	ISO 13485, ISO 9001
Packaging Overview	100 gloves per dispenser 10 dispensers per case 1000 gloves per case
Storage Instructions	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country Of Origin	Thailand
Product Segmentation	Robust
Antistatic	Yes
Vulcanization Chemical Accelerators	<ul style="list-style-type: none"> <li>Zinc Dibutyldithiocarbamate (ZDBC)</li> </ul> <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p>

## PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	240/9.45		ASTM D6319, ASTM D3767
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151, EN 455-1, EN 374-2
Palm Thickness (mm/mils)	0.13/5.1		ASTM D6319, ASTM D3767
Finger Thickness (mm/mils)	0.16/6.3		ASTM D6319, ASTM D3767
	BEFORE AGING	AFTER AGING	
Ultimate Tensile Strength (MPa)	≥ 14	≥ 14	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412 & D573
Force at break (N)	≥ 6	≥ 6	EN 455-2

## ORDERING INFORMATION

Size	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)	XXL (10.5 - 11)
Product Code	93256070	93256080	93256090	93256100	93256110

## Performance Standards and Regulatory Compliance

