

### Description:

With 2 kW cooling capacity and 230 m<sup>3</sup>/h air volume, the PT 2000 SP provides instant cooling exactly where it is needed.


Simply switch on and cool - the Spot cooler is ready for use immediately without any installation preparations - a socket is all that is needed!

The Spot cooler's cold air line can be tilted 150 degrees and swiveled 360 degrees for pinpoint cooling, allowing the cooling air to be blown out specifically to the desired area.

The combination of solid workmanship, easy handling and an attractive price-performance ratio makes this spot cooler the best choice for precise cooling applications in workshops, work halls, canteen kitchens and many other working environments.

Use the PT 2000 SP, for example, for efficient cooling of individual work areas or machines and plant components, of server and network rooms, for spot cooling at events, for welding work or in the catering trade.

### Product Code: PTA2000SP

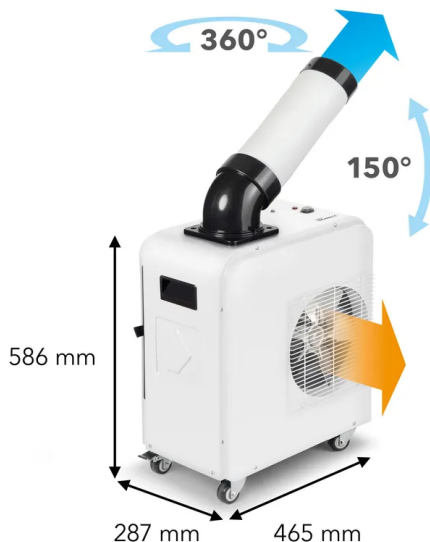

### Specification:

- Power Supply: 220 - 240v 50Hz
- Cooling Capacity: 2kw (7000Btu)
- Air Flow: 230m<sup>3</sup>/h
- Power Consumption: 950w
- Operating Temperature Range: 20 - 43°C
- Water Tank Capacity: 3ltr
- Sound Level: 52dB(A)
- Dimensions: 28.7 x 46.5 x 58.6 cm (LxDxH)
- Weight: 27kgs