

PW62 - HV Extreme Ear Muff Helmet Mounted

Collection: Ear Muffs

Range: Hearing Protection

Materials: ABS, PU Foam, Neoprene, Carbon Steel, Nylon, Foam

Product information

The HV Extreme Ear Muff helmet mounted is part of our new generation, premium Ear Muffs. Its dual pin adjustable cups offer an optimised, alongside a stylish grey and orange design. Excellent attenuation performance provides superior protection against harmful noise. For 30mm universal helmet side slots.

Standards

EN 352-3 (SNR 33dB)

Ear Muffs


Portwest Hearing protection range includes PPE with different level sound attenuation, to be adapted to various working environments giving the correct protection from dangerous noise, without isolating the workers. New models and colours for earmuffs allow a personalised choice. An updated range of earplugs complete our competitive and performing offer.

Hearing Protection

Hearing problems occur when you are exposed to hazardous working conditions without wearing the correct protective equipment.

Features

- Excellent attenuation rate
- Easy to clip-on
- Adjustable dual pin system provides multiple positioning for better fit
- Contrast colouring for added style
- Compatible with Endurance Helmets
- Compatible with Height Endurance Helmets
- CE certified
- CE-CAT III
- Retail bag which aids presentation for retail sales
- Individually packed for vending machines

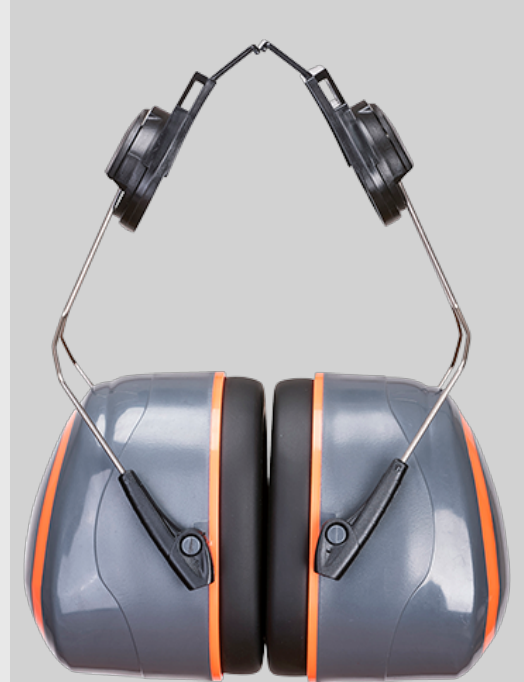



PRODUCT SPECIFICATION & TECHNICAL DATA

PW62 - HV Extreme Ear Muff Helmet Mounted **Commodity Code: 6506101000**

Test House

ALIENOR CERTIFICATION (Notified Body No.: 2754)

ZA du Sanital

86100, France

Cert No: 2754/1246/159/07/21/0593

SATRA Technology Centre Ltd (Notified Body No.: AB: 0321)

SATRA Technology Park

NN16 8SD, United Kingdom

Cert No: AB0321/19873-01/E01-01

Carton Dimensions/Weight

| Item | Colour | Len | Wid | Hgt | Weight(Kg) | Cubic(m ³) | EAN13 | DUN14 |
|---------|-------------|------|------|------|------------|------------------------|---------------|----------------|
| PW62GOR | Grey/Orange | 52.0 | 35.0 | 53.0 | 0.3420 | 0.0965 | 5036108360505 | 15036108849205 |