

# GRIPPS®

## GRIPPS® Technical Specification Sheet.

### GRIPPS® Gripplock Cable Models: H01040, H01041



**H01040 / H01040-5 / H01040-10**  
Gripplock Cable 3.0mmx120mm / 0.11"x4.72"  
**Max Load:** 1kg / 2.2lbs  
**Max Tether Length:** 91cm / 36cm  
**ANSI/ISEA 121-2018 COMPLIANT**

**H01041 / H01041-5 / H01041-10**  
Gripplock Cable 3.0mmx150mm / 0.11"x5.90"  
**Max Load:** 1kg / 2.2lbs  
**Max Tether Length:** 91cm / 36cm  
**ANSI/ISEA 121-2018 COMPLIANT**

## GRIPPS® Gripplock Cable

### SAFETY INFORMATION

**⚠️ WARNING** Before using the GRIPPS® Gripplock Cables, read all provided safety information pertaining to the use of your Dropped Tool Prevention (DTP) device. **FAILURE TO DO SO COULD RESULT IN INJURY OR DEATH.**

The user of a DTP device bears the responsibility of reading all safety information contained herein. Keep this manual for future reference.

#### Intended Use:

When used properly, the GRIPPS® Gripplock Cables can prevent workplace hazards resulting from dropped tools. These may include personal injury and material damage.

GRIPPS® does not approve use of this device for any activities not described in the User Instructions. This device is not intended to be used in any recreational activity, as a personal fall-arrest device or in any other manner not described herein.

**⚠️ WARNING** Misuse of this device could result in serious injury or death.

Adhere to all manufacturer recommendations regarding the operation and maintenance of this device. For additional information, contact GRIPPS® customer support.

**Read and adhere to the following in order to ensure correct operational functionality:**

- Your DTP should never be used as a personal fall-arrest device or restraint system.
- Do not use this device with tools that exceed the specified maximum load/weight.
- A DTP device used in applications that exceed the limits of operation specified by the manufacturer should be considered unsafe and should be replaced.
- Do not tether a tool over 2.5kg/5.5lbs directly to your clothing or person.
- Inspect your DTP device before each use.
- Ensure the DTP device is securely connected to a load rated tool connector or anchor point before use.
- Inspect any tool connector point before it is connected to the DTP device.
- Modification of the DTP device voids all warranties and violates manufacturer recommendations.
- Do not use a tool that cannot be connected to your DTP in the manner specified by GRIPPS®.
- It is unsafe to extend the length of the DTP product by any means.
- Do not use this product if it will create an unsafe working environment.
- Use extra precaution around moving machinery, moving parts, electrical hazards, extreme temperatures, chemical hazards, or combustion hazards.
- Avoid contact between any connected tethers and rough or sharp edges.
- All connected tools and equipment, including connection points, must be compatible for use with this DTP device.
- Always wear appropriate personal protective equipment.

- If a tether has arrested a dropped tool or object, it should be taken out of service and replaced.
- All procedures shown in this instruction are for GRIPPS® Adjustable Two-Way Radio Holster products only.


### GENERAL USE AND CARE

GRIPPS® Gripplock Cables are designed to create a secure tool connection point by simply threading the Gripplock Cable through an existing hang-hole/slot in a tool. They offer a permanent and convenient connection point for your tool requiring one click of both ends to join. Unlike Screwlock Cables, they do not require any additional thread locking compound. The diameter of the Gripplock Cable is slightly larger than the GRIPPS® Screwlock Cable. If your tool has a small opening, you may want to consider the GRIPPS® Screwlock Cable.


#### Before Use:

Thoroughly inspect your GRIPPS® DTP device before each use. Do not use any component that presents deformities or deterioration.


### HOW TO USE / INSTRUCTIONS:

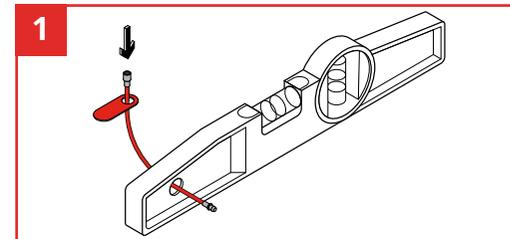

Feed the Gripplock Cable through the pre-formed hole in the tool.

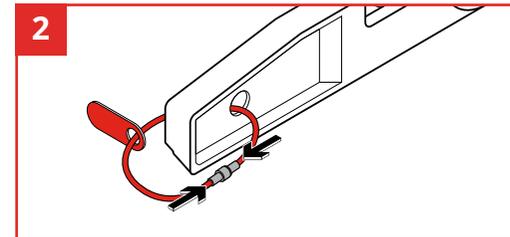

Join the two ends together, ensuring a firm application and click sound is heard/felt. Test Gripplock Cable cannot be separated by tugging both ends firmly.

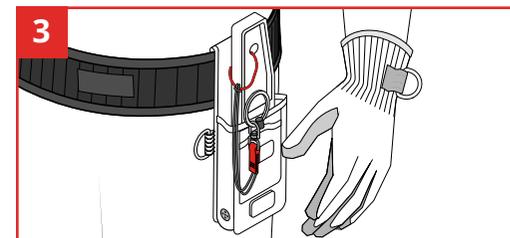

Your Gripplock Cable is now ready to be connected with a suitable GRIPPS® tether.

**After Use Care:**  
Clean and inspect the holster and any connected tethers. For tougher stains, use warm water and a mild soap or detergent. Do not use again until dry.

Store in a clean and dry environment. Proper care will help to ensure that it will operate effectively and extend its service.

# GRIPPS®