




- ❏ Professional industrial alkaline battery
- ❏ 1.5V nominal open circuit voltage
- ❏ Codes: LR20, D, MN1300, ID1300, AM1, 13A
- ❏ Complies with IEC60086-1, -2, -5, and EU Directive 2006/66/EC - 2013/56/EU
- ❏ Weight: ~140 gms
- ❏ 7 year shelf life
- ❏ Operating temp: -18°C to 50 °C
- ❏ Recommended storage temp: not to exceed 30 °C

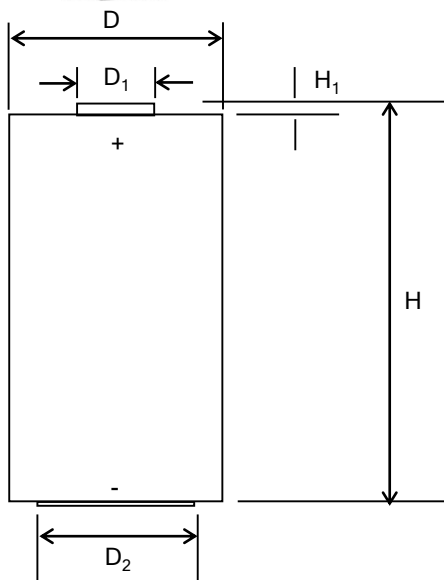

	Min (mm)	Max (mm)
D	33.0	34.0
H	59.6	61.0
D ₁		9.5
H ₁	1.5	
D ₂	18.0	

Example Performance

Conditions	End voltage	Average Duration	Application
600mA, 2h/day	0.9V	16 hrs	Portable audio
2.2Ω, 1h/day	0.8V	24.5 hrs	Toy
2.2Ω, 4m/15m, 8h/day	0.9V	22.5 hrs	Portable lighting
10Ω, 4h/day	0.9V	128 hrs	Radio

Laboratory tests under standard conditions
20 °C ± 2 °C, 55 ± 20% RH