




DATA SHEET

ProSolve™ Anti-Slip Tape Installation

- An application of ProSolve™ Anti-Slip Tape can last for years if installed correctly; we therefore recommend that you follow these simple guidelines for a worry-free installation.
- Ensure that the surface is clean and dry – it should be free from all moisture, dirt and grease
- We recommend the use of an IPA (Isopropyl Alcohol) Cleaner (like the ProSolve™ Easy Clean Aerosol – ECS5) to help clean the surface, this will effectively dissolve any oils and grease on the surface
- If the ambient temperature is above 15°C the adhesive will stick to the surface much better
- If the surface is porous then the use of a suitable surface primer is recommended to help seal it
- Cut the required length. For best results ensure that the edges are slightly rounded, this will help prevent the tape from lifting from the corners

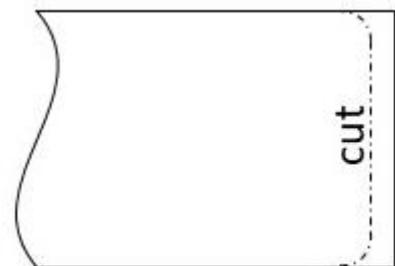

- Gently lay down the tape
- Ensure that there are no air bubbles and that the edges are flat against the surface by going over the tape with an edge roller
- In high traffic areas, or areas that are at risk from moisture, we recommend that an Edge Fix Adhesive is used – applying a small bead down the sides of the tape will help to reduce the risk of lifting and help to secure the tape and extend its life

IMPORTANT NOTICE

All statements, technical information and recommendations are based on tests we believe to be reliable as at the date of hereof, but the accuracy or completeness thereof is not guaranteed. Please ensure before using the product that it is suitable for your intended use. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, other than for fraudulent misrepresentation, ProSolve expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information.

BEFORE USE, CONSULT THE SAFETY DATA SHEET OF THE PRODUCT.