



The  
Safety Supply  
Company

## INSTRUCTIONS FOR USE OF EAR MUFF TYPE: RW 666

### APPLICATION:

When worn properly and given adequate care, it provides excellent protection that filters high frequency noise. We find most noise problems are from dynamic machines such as workshop equipment and motor saws.

### REQUIREMENTS:

This hearing protector complies with the requirements of the European Directive 89/686/EEC annex II by means of the European Standards EN352-3:2002 "Hearing protectors-Safety requirements and testing-Part 3: Ear muffs attached safety helmet".

### MARKING:

The appropriate marking\* can be found on the cups.

\*CE mark was issued by the notified body 0403.

**Finnish Institute of Occupational Health**  
**Topeliuksenkatu 41 a A, FI-00250 Helsinki Finland**

### USE:

1. Insert connector of the ear muff into cap slots.
  2. Place cap on head with muffs in outer "rest" position. Be sure cap is placed properly on head.
  3. Lower muff against head and adjust ear cups to adequate height and pressure so they seal firmly against head.
  4. Make sure cap suspension does not interfere with seal.
- Put the ear muffs on before exposing yourself to noise and wear them during the whole noise exposure.

### WARNING:

1. This ear muff is of 'normal size range' complying with EN352-3; it will fit the majority of wearers.
2. If data given in that leaflet are taken into account, safety can be greatly undermined.

### ATTENUATION VALUES:

Frequency(Hz)	63	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	14.0	13.8	19.4	27.6	34.4	33.1	30.1	26.7
Standard Deviation (dB)	3.2	3.8	2.5	2.1	3.7	2.7	2.8	5.0
Assumed protection (dB)	10.8	10.0	16.9	25.5	30.7	30.4	27.3	21.8
SNR:26		H:27	M:26	L:18				

**WEIGHT OF THE EAR-MUFF:210g**

### CLEANING:

Cleaning with warm soapy water, do not use organic solvents or alcohol for cleaning.

### DISINFECTION:

1. It is required to disinfect the ear-muff every 3 months according to the use.
2. Any part of the ear muff which is in contact with the wearer shall be disinfected with appropriate solution.

### STORAGE:

When not in use, it is recommended to store the ear muff in a clear dry polybag.

## **(GB) Installations Instructions for RW 302A/O**

(Read all instructions and warnings before wearing)

RW 302A and RW 3020 are sometimes shipped with the suspension disengaged from the shell to prevent distortion during shipping. The suspension must be correctly installed according to the instructions to assure proper fit and protection.

RW 302A and RW 3020 meet EN 397 Standard.

1. Turn hard hat upside down. Place suspension inside hard hat with brow pad toward front bill. See Figures 1 and 3.
2. Bending the hanger key outward at hinge, insert key into respective key slot (Figure 2). Push key firmly until it snaps into place. Repeat for each hanger key.

### **Adjusting the Suspension Size:**

#### **- Standard Suspension**

1. Squeeze top and bottom edges of rear buckle together with your thumb and forefinger (Figure 4).
2. At the same time, decrease headband size by sliding right hand portion of headband through buckle.
3. Place the hard hat on your head and pull it down allowing headband to expand until it feels comfortable. **DO NOT OVER TIGHTEN.**

#### **- Ratchet Suspension**




1. Turn ratchet knob counterclockwise until headband opens to largest size.
2. Place hard hat on your head. Turn ratchet knob clockwise until headband is comfortable (Figure 5). **DO NOT OVER TIGHTEN.**

### **WARNINGS:**


Hard hats are designed to provide limited protection to the head by reducing the force of falling objects striking the top of the hard hat shell. While limited protection is provided in other parts of the shell, this hard hat was not designed to provide front, side or rear impact protection. Avoid contact with electrical wires. Inspect your hard hat shell and suspension regularly. Check immediately if you notice any signs of wear, damage, abuse or environmental degradation. If the hard hat has sustained a forcible blow (impact), dispose of it immediately, even if damage is not visible.

### **CLEAN:**

Clean the hard hat and suspension with mild soap and lukewarm water. Do not use paints solvents, chemicals, adhesives, gasoline or like substances on this hat. The impact resistance and other protective properties of the hat may be destroyed by such substances. These dangerous conditions may not be apparent or readily detectable by the user.

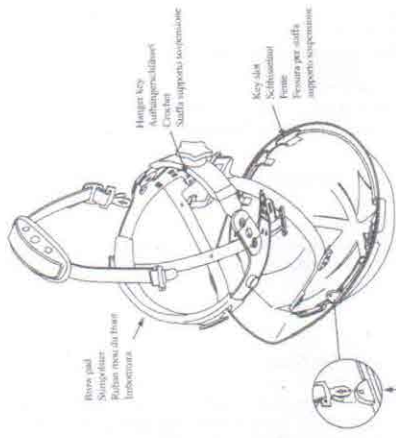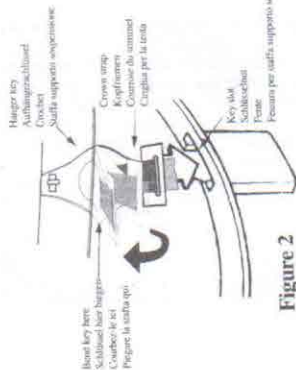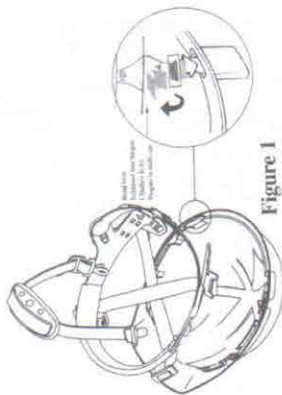

Quick strap attachment position  
Beliebigigstellbar für Anbringung  
Position de l'attache pour la courroie de maintien  
Posizione per l'abbracciamento della cinghia per il mento





## USER'S INFORMATION FOR FACE SHIELD

TYPE ☐ RW 101 ☐ RW 102

### CAUTION

This face shield does not provide unlimited face protection. For your own protection read these instructions completely before using this face-protection.

### REQUIREMENTS

This face shield complies with the requirements of the European Directive 89/686/CEE annex II by means of the European Standard EN166:2001 or EN1731:2006 "Personal Eye Protectors-Specification".

### STORAGE

When not in use, it is recommended to store the face shield in a clean and dry polybag or case for visor protection.

### DIRECTION FOR USE

This face shield has been designed for your personal safety. It must be worn for the whole duration of exposure to hazards, leave the work area if dizziness or irritation occurs, or if the face shield becomes damaged.

### CLEANING AND MAINTENANCE

To maintain your face shield in good condition:


1. Do not use abrasive materials, clean and rinse in warm soapy water and dry with a soft cloth.
2. Any part of face-protector which are in contact with the wearer shall be disinfected by alcohol.

### FIELD OF USE

This face shield is designed to protect the user against eye and face injuries through mechanical impact or splashes liquids. The face shield is marked on the brow protection and visor with a series of numbers and symbols to indicate the manufacturer, the field of use, the protection capabilities and performance characteristics of the face-protector. Appropriate markings on ocular and frame are signified as follows:


Marking of the ocular:

R I B F S CE

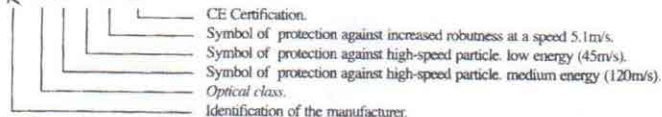

Marking of the framer:

R EN166 EN1731 3 B F S CE

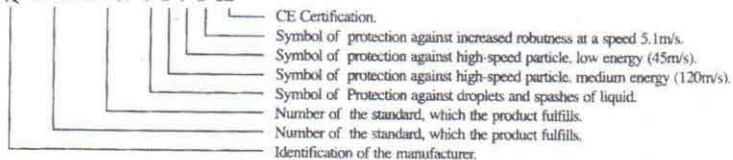

### REPLACEMENT OF SPARE PARTS, ACCESSORIES AND INSTRUCTIONS FOR FITTING

Only use original spare parts. To replace the visor, you should ensure the compatibility of marking and The right visor is fitted.

### DURATION OF USE

Inspect for damage regularly. When the face-protector has become brittle face shield should be replaced.

### WARNING:

- This product is for face protection against moderate impact hazards but NOT unbreakable.
- Do not modify or alter the face protector.
- Pitted or scratched screen reduce vision and seriously reduce protection and should be immediately replaced.
- This face protector has not any filtering action. It does not protect against molten metal splash, hot solids or electrical hazard.
- Always check with supervisory personnel to ensure you are being given the proper protection relative to working conditions, consult relative European standards.
- The materials which may come into contact with the wearer's skin could cause allergic reactions to susceptible individuals.
- If the symbols F, B and A are not common to both ocular and the frame then it is the lower level which shall be as signed to the complete eye-protector.

### CERTIFICATION

CE mark was issued by the notified body 0194

INSPEC International Ltd

56 Leslie Hough Way Salford Greater Manchester M6 6AJ