

# SKYTEC™ | Tons TP-5

## CUT RESISTANT GLOVE WITH POLYURETHANE PALM COATING AND RECYCLED POLYESTER

From the TONS range, with very good mechanical resistance and excellent cut protection.

### FEATURES

- › Cut resistant: Level D (EN 388:2016)
- › Durable palm coating resists rips and abrasion
- › Excellent grip in dry handling conditions
- › Flexible close-fitting design for a comfortable wearing experience
- › Breathable and lightweight
- › Knitwrist cuff style
- › RCS (Recycled Claim Standard) certified
- › 1 pair = 1PET bottle of 500ml recycled



CUT LEVEL D

VENDING MACHINE COMPATIBLE

RECYCLED 100 claim standard

ECO

### SUITABLE FOR

- |   |   |
|---|---|
| <p><b>Typical Industries</b></p> <ul style="list-style-type: none"> <li>▪ Automotive</li> <li>▪ Construction</li> <li>▪ Engineering</li> <li>▪ Logistics</li> <li>▪ Metals</li> <li>▪ Waste Management</li> </ul> | <p><b>Suitable Applications</b></p> <ul style="list-style-type: none"> <li>▪ Glass Handling</li> <li>▪ Injection Moulding</li> <li>▪ Metal Fabrication</li> <li>▪ Waste Management</li> </ul> |
|---|---|

### CERTIFICATION

CAT II	EN 388:2016	ANSI/ISEA 105
	4X43D	

See overleaf for explanation



# Tons TP-5

## PRODUCTION INFORMATION

<b>MATERIALS</b>	LINER:	13 gauge HPPE, glass fibre, recycled polyester
	COATING:	Polyurethane (PU)
<b>COLOUR</b>	Grey / Grey	
<b>LENGTH (mm)</b>	250 (size dependent)	
<b>CUFF STYLE</b>	Elasticated knit wrist	

## ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	TNS0600	10 pairs per bag
7/S	TNS0601	
8/M	TNS0602	120 pairs per case
9/L	TNS0603	
10/XL	TNS0604	
11/XXL	TNS0605	


## RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

## CERTIFICATION LEGENDS



### MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS\*

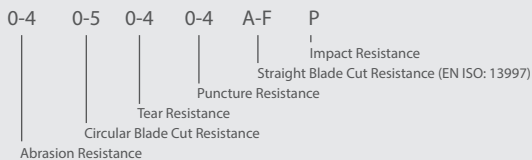

\*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE	
Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

ANSI/ISEA 105-2016 ABRASION RATING CHART							
<b>Abrasion Level Rating</b>	0	1	2	3	4	5	6
<b>Gram Load</b>	500	500	500	500	1000	1000	1000
<b>Abrasion Cycles to Fail</b>	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE	
ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

# GLOBUS