


Cobra Grade 8 Short Link Chain – G8CB

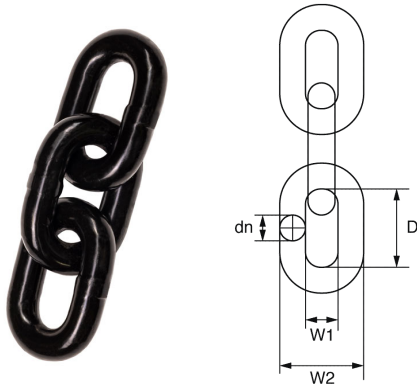

- Grade 8 alloy steel.
- Black electrophoresis finish.
- Conforms to BS EN 818-2.
- Temp. Range: -20 °C to +200 °C.
- Marked with material grade, manufacturers ID and traceability code.

Certs available **2.1**
3.1 **DoC**

Product Code	dn	D	W1	W2	Weld Dia	Weight	Min Packing Qty
	mm	mm	mm	mm	mm	kgs/mtr	mtr
G8CB6	6	18	7.8	22.2	6.6	0.8	500
G8CB7	7	21	9.1	25.9	7.7	1.1	500
G8CB8	8	24	10.4	29.6	8.8	1.4	400
G8CB10	10	30	13	37	11	2.2	300
G8CB13	13	39	16.9	48.1	14.3	3.8	150
G8CB16	16	48	20.8	59.2	17.6	5.7	100
G8CB20	20	60	26	74	22	9	75

Product Code	dn mm	D mm	W1 mm	W2 mm	Weld Dia mm	Weight kgs/mtr	Min Packing Qty mtr
G8CB22	22	66	28.6	81.4	24.2	10.9	50
G8CB26	26	78	33.8	96.2	28.6	15.2	50
G8CB32	32	96	41.6	118	35.2	24.1	50

Product Code	dn mm	W.L.L. t	M.P.F. kN	M.B.F. kN (min)	Bend Deflection mm min (F)
G8CB6	6	1.12	28.3	45.2	4.8
G8CB7	7	1.5	38.5	61.6	5.6
G8CB8	8	2	50.3	80.4	6.4
G8CB10	10	3.15	78.5	126	8
G8CB13	13	5.3	133	212	10
G8CB16	16	8	201	322	13
G8CB20	20	12.5	314	503	16
G8CB22	22	15	380	608	18
G8CB26	26	21.2	531	849	21
G8CB32	32	31.5	804	1290	26