


Shorty Cylinder – TSSC Series

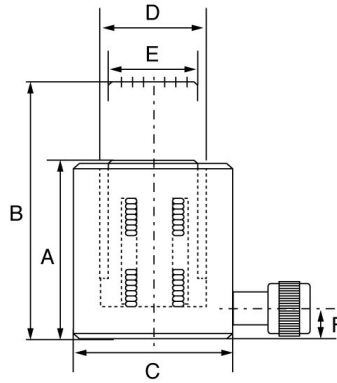

TECPOS

- Maximum Pressure: 700 Bar.
- Hydraulic Coupler: TBC 381F(PT3/8).
- Orange painted finish.
- Compact, flat design for use where other cylinders will not fit.
- Marked with CE, capacity, manufacturers ID, product ID mark and traceability code.
- Certs available **2.1** **DoC**

Product Code	Cyl. Cap.	Stroke	Cyl. Effective Area	Oil Cap.	Retracted Height	Extended Height	Cyl. Out Dia.	Cyl. Bore Dia.	Piston Rod Dia.	Base to inlet port	Weight	Pump
	t	mm	cm ²	cc	A mm	B mm	C mm	D mm	E mm	H mm	kgs	
TSSC1044	10	44	15.2	66	99	143	68	44	38	17	2.6	1B or 08
TSSC2044	20	44	28.3	124	99	143	88	60	51	17	4.3	1B or 08
TSSC3044	30	44	44.2	194	99	143	105	75	64	17	6.2	1B or 08
TSSC5050	50	50	63.6	318	109	159	125	90	75	19	10.2	1B or 08

Product Code	Cyl. Cap.	Stroke	Cyl. Effective Area	Oil Cap.	Retracted Height	Extended Height	Cyl. Out Dia.	Cyl. Bore Dia.	Piston Rod Dia.	Base to inlet port	Weight	Pump
	t	mm	cm ²	cc	A mm	B mm	C mm	D mm	E mm	H mm	kgs	
TSSC10050	100	50	132.7	663	139	189	165	130	100	27	21	1C or 17
TSSC15050	150	50	201	1005	170	220	208	160	135	33	41.1	1C or 17
TSSC20050	200	50	283.5	1417	180	230	245	190	170	38	60.3	1C or 17