


Cobra Grade 8 Component Connector – CG8CC

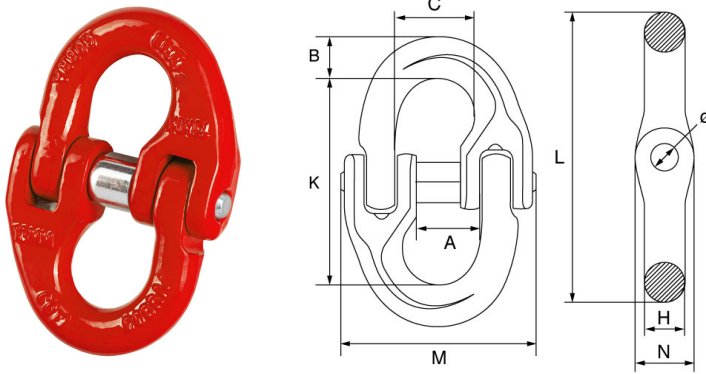

- Grade 8 alloy steel.
- Red painted finish.
- Conforms to BS EN 1677-1.
- Temp. Range: -20°C up to +200°C.
- Marked with material grade, manufacturers ID, size, product ID mark and traceability code.
- Certs available **2.1** **DoC**

Product Code	Chain Dia	A	B	C	H	K	L	M	N	Ø
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
CG8CC6	6	15.5	7.5	17.4	7	39	54	42	11	5.3
CG8CC8	7/8	20.5	9	24	8.8	58	77	55	14.8	6.3
CG8CC10	10	26	12	28	11.5	69	92	69	17.8	8.1
CG8CC13	13	30	15	35	15	85	115	86.6	25	10.3
CG8CC16	16	35	19.8	39	19.8	85	142	103	30	12.3
CG8CC20	20	41.8	24	46	22	118	166	120	34	15.3

Product Code	Chain Dia	A	B	C	H	K	L	M	N	Ø
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
CG8CC22	22	49.5	26	57	26	138	190	147	40	17.3
CG8CC26	26	58	31	67.5	30	154	216	174	44	20.5
CG8CC32	32	67.5	38	84.5	37	201	277	214	56	24.5

Technical Data

Product Code	Chain Dia	W.L.L.	M.P.F.	M.B.F.	Weight
	mm	t	kN	kN	kgs
CG8CC6	6	1.12	27.44	43.9	0.08
CG8CC8	7/8	2	49	78.4	0.15
CG8CC10	10	3.15	77.2	123.5	0.32
CG8CC13	13	5.3	130	208	0.69
CG8CC16	16	8	196	314	1.2
CG8CC20	20	12.5	306	490	1.97
CG8CC22	22	15	367.5	588	3.07
CG8CC26	26	21.2	519.4	831	4.68
CG8CC32	32	31.5	772	1,235	8.75