

**Product Datasheet model uvex suXXeed 9181 265**

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,  
D-90766 Fürth**

**1. Product Characteristics**

- sporty safety spectacle in an appealing, dynamic design
- ergonomically shaped side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- soft, flexible nose pad adapts to the wearer, delivering a nonslip and pressure-free fit
- UV400 – 100 % protection against dangerous UV radiation up to 400 nm
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch resistant lens
- optional clip-in frame seal provides extra protection against particles, dirt and dust
- metal-free

## 2. Technical Details Body

### Frame

Material	PC-TPU / TPE
Version	soft-grip temple ends, soft, flexible nose pad
Colour	anthracite, blue


### Marking

Manufacturer 's ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

## 3. Technical Details Lens

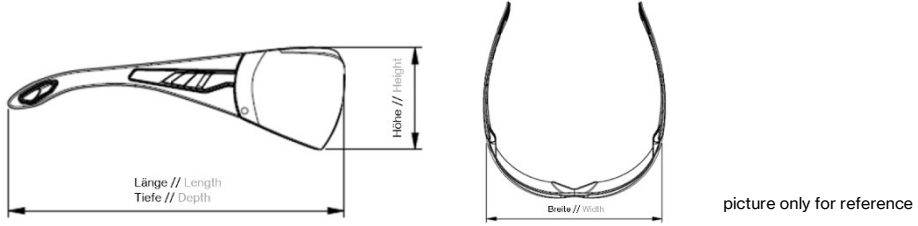
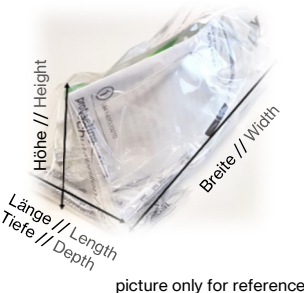


Material	PC
Thickness	1.9 mm at PD
Coating	uvex supravision excellence
Colour	clear
UV protection	UV400

### Marking

Filter	2C-1.2 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

## 4. Logistical Information

### Product

Weight	27g		
Dimensions (L x W x B) in approx. mm			
	158 x 150 x 50		
	<b>Packing unit 1</b>	<b>Packing unit 2</b>	<b>Packing unit 3</b>
EAN Code	4031101827544	4031101956053	4031101827551
Quantity in pcs.	1	10	160
Dimensions (L x W x H) in approx. mm			
	58 x 150 x 60	185 x 290 x 97	600 x 400 x 400
Net weight in approx. g	27	270	4,320
Gross weight in approx. g	41	513	9,110
Country of Origin	Germany		

## 5. Miscellaneous

Standards	EN 166 + EN 170
PPE Category	Category II