




## Cobra Grade 8 Master Link – CG8ML

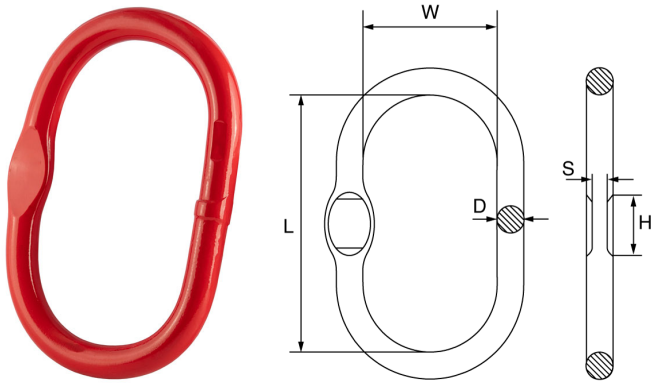

- Grade 8 alloy steel.
- Red painted finish.
- Conforms to BS EN 1677-4.
- Temp. Range: -20°C up to +200°C.
- Marked with material grade, manufacturers ID, size, product ID mark and traceability code.
- Certs available **2.1** **3.1** **DoC**

| Product Code | W.L.L.<br>t | Chain Dia<br>mm | D<br>mm | L<br>mm | W<br>mm | SxH<br>mm | Weight<br>kgs |
|--------------|-------------|-----------------|---------|---------|---------|-----------|---------------|
| CG8ML87      | 2.12        | 8/7             | 16      | 110     | 60      | 7x25      | 0.54          |
| CG8ML108     | 3.15        | 10/8            | 18      | 135     | 75      | 8x28      | 0.823         |
| CG8ML1310    | 5.3         | 13/10           | 22      | 160     | 90      | 11x35     | 1.5           |
| CG8ML1613    | 8           | 16/13           | 26      | 180     | 100     | 13x43     | 2.32          |
| CG8ML2016    | 12.5        | 20/16           | 32      | 240     | 140     | -         | 5.32          |
| CG8ML2220    | 17          | 22/20           | 40      | 300     | 160     | 20x64     | 8.96          |

| Product Code | W.L.L. | Chain Dia | D  | L   | W   | SxH | Weight |
|--------------|--------|-----------|----|-----|-----|-----|--------|
|              | t      | mm        | mm | mm  | mm  | mm  | kgs    |
| CG8ML2622    | 21.2   | 26/22     | 45 | 340 | 180 | -   | 12.8   |
| CG8ML3226    | 31.5   | 32/26     | 50 | 350 | 190 | -   | 16.55  |

| Product Code | W.L.L. | M.P.F. | M.B.F. |
|--------------|--------|--------|--------|
|              | t      | t      | t      |
| CG8ML87      | 2.12   | 5.3    | 8.48   |
| CG8ML108     | 3.15   | 7.875  | 12.6   |
| CG8ML1310    | 5.3    | 13.25  | 21.2   |
| CG8ML1613    | 8      | 20     | 32     |
| CG8ML2016    | 12.5   | 35     | 50     |
| CG8ML2220    | 17     | 42.5   | 68     |
| CG8ML2622    | 21.2   | 53     | 84.8   |
| CG8ML3226    | 31.5   | 78     | 126    |