



## Coverall Series

### Type 5B/6B Microporous Coverall **Supreme TTF**

#### Description:

Coverall made of polypropylene laminated with a microporous polyethylene film, with zipper and hood, elasticated arm and foot band (latex-free). Light weight and breathable, air permeable and waterproof. Supplying normal barrier against dry particles and limited liquid splash of chemicals.

#### Application:

- Paint spraying
- Pharmaceutical and cosmetic industry
- Epidemic and virus
- Asbestos removal and abatement
- Phytosanitary treatment
- Fog of Paint spraying
- Low level insecticide and pesticide spraying

#### Features:

- Microporous film layer ensure Breathable;
- 4-Thread seam over-locked
- Air permeable and water proof
- Latex Free, Fiberglass Free
- Single Use only



\*Face mask, shoe/sleeve covers not included.

#### Specifications:


Item Name	Microporous Coverall TYPE 5/6
Material	Microporous, 65 g/sm (+/-3.0)
Size	S, M, L, XL, 2XL, 3XL, 4XL
Hood	With Hood
Elastic	Elastic bands of hood, cuffs, ankles
Available Colors	White <input type="checkbox"/>

**Models:**

Refs:	Models	Packaging	Carton Dimension	G.Weight
SupremeTTF	White, elastic band	1pc/bag, 50pcs/ctn	50*31*52cm	12.0kg

\*Artworks on inner packing and outer carton can be customized (OEM design acceptable).

**Measurements:**

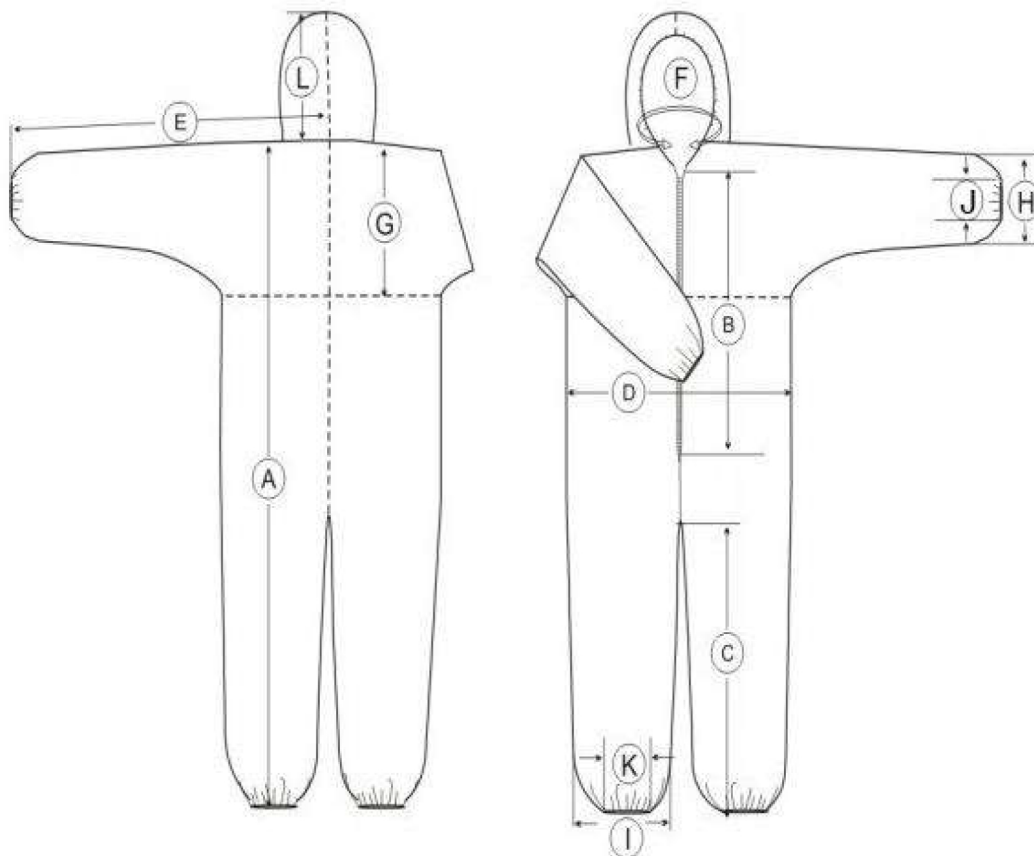

Size-cm	A	B	C	D	E	F	G	H	J	I	K	L	M
S	165	73	80	58	90	56	32	16	8	24	12	34	36
M	168	75	82	60	92	56	34	16	8	24	12	34	36
L	172	75	83	64	94	56	36	16	8	24	12	34	38
XL	178	80	85	68	96	56	38	16	8	24	12	34	40
2XL	181	80	86	72	98	56	40	16	8	24	12	34	42
3XL	184	82	88	76	100	56	42	16	8	24	12	34	44
Tolerance	+/-2	+/-2	+/-2	+/-1	+/-2	+/-1	+/-1	+/-1	+/-1	+/-1	+/-1	+/-1	+/-1

\*"M" is the leg width.

## Protection Standards:

Type 5 : EN ISO 13982-1 : Protection against hazardous dry particulates

Type 6 : EN ISO 13034 : Protection against light spray of liquids

EN ISO 13688:2013 : Protective clothing-general requirements

EN ISO 14126 : Protection against infectious agents

EN ISO 1149-5 : Antistatic garment requirements

## Quality Management:

Standard process. CE Marking for Each Packaging Level

## Shelf Life:

**5 Years.**

## Caution:

\*Store in a dry place at temperatures between 10°C and 30°C, without direct sunlight away from heating appliances.

\*Be careful not to stretch more than the product allows as there is a risk of breaking the fabric or the elastics.

## Symbols:

