


Harness SPARTAN™ 1 POINT

A Harness that has value in mind, a stylish product that does not falter when safety is paramount.

TECHNICAL
SPECIFICATION

HEIGHT SAFETY

FAR0301


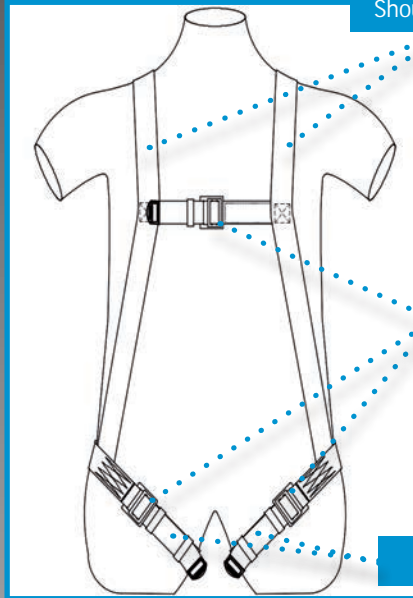


Shoulder straps

Parachute buckles

Leg straps

Stitching pattern

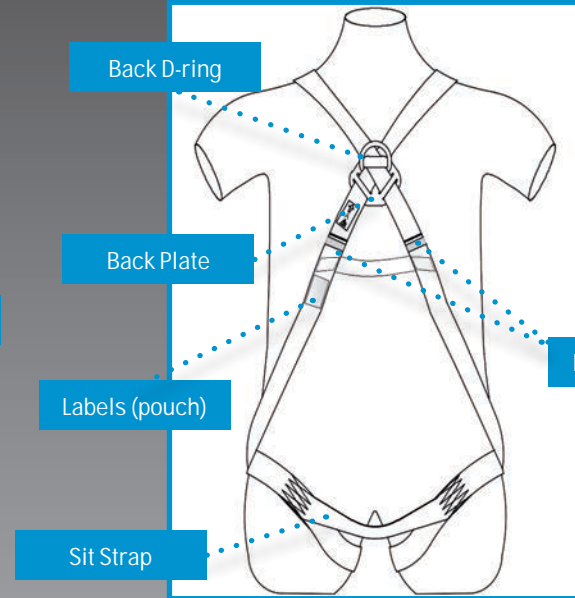

Back D-ring

Back Plate

Labels (pouch)

Sit Strap

Fall indicators

STITCHING THREAD

Material: High-tenacity polyester.

WEBBING

Material: Polyester.

Width: 44+-1 mm.

Breaking strength: 25 kN.

CHARACTERISTICS

One dorsal attachment D-ring for fall arrest.

Adjustable chest and leg straps.

Sub-pelvic strap.

Plastic retainers to keep straps tidy.

Fall indicator for easy inspection.

Labels of inspection and instructions protected in a black PVC pouch.

CONFORMITY

EN 361: 2002 Rated to 140 kg.

The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.

Static strength: 15 kN for 3 min at each attachment element.

Dynamic strength: Free fall from 4 m height donned to a test dummy weighing 100 kg at each attachment element.

METAL COMPONENTS

Material: Alloy steel.

Finish: Golden yellow galvanized.

Breaking strength: 23 kN (buckle and frame 15 kN).

DIMENSIONS

Size: Universal.

Weight: 920 g (+- 10 g).

CLEANING & MAINTENANCE

Maintenance of this product must only be carried out by a trained and competent person who will:

Clean the product using the following procedure: using only warm water, using only mild detergent, using only a sponge or soft nylon brush, using fresh clean water to rinse the detergent off the product, drip dry the equipment allowing the product to thoroughly dry out before next use.

Ensure that the following cleaning methods are NOT used: water over 40° C, bleach, any detergent not suitable for bare skin, wire brushes or other scouring agents, jet wash or other power products, radiators or other direct heat sources, ensure that a thorough visual and tactile examination of the product is made after cleaning, before the item is allowed to be re-used.


Work restraint lanyard

**TECHNICAL
SPECIFICATION**

HEIGHT SAFETY

Fixed length lanyard equipped with 2 standard connectors on both ends.

FAR0313

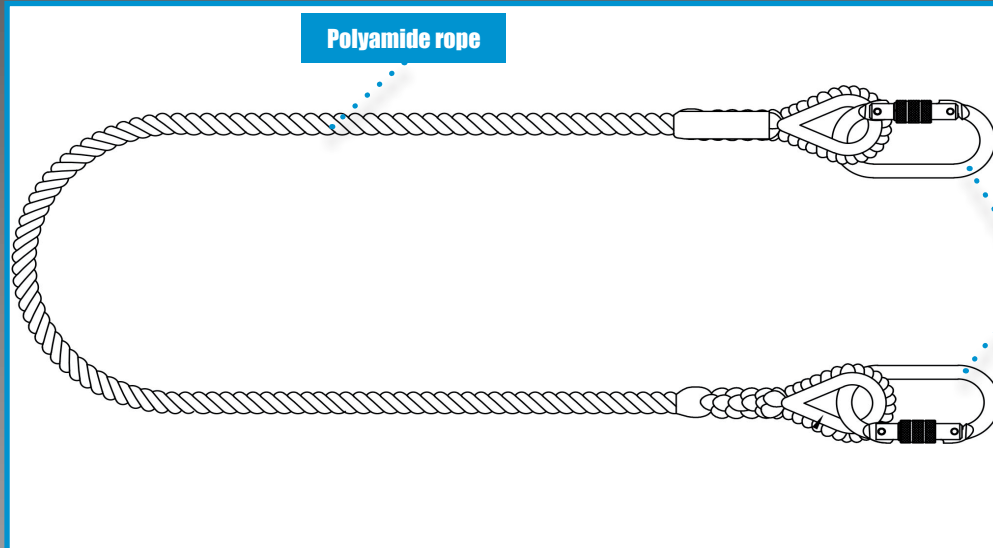

METAL COMPONENTS

Material: Alloy steel connectors.

Finish: Golden yellow galvanized.

DIMENSIONS

Size: 1.8 meters

Weight: 555 g (+/- 10 g)

CLEANING & MAINTENANCE

Maintenance of this product must only be carried out by a trained and competent person who will:

Clean the product using the following procedure: using only warm water, using only mild detergent, using only a sponge or soft nylon brush, using fresh clean water to rinse the detergent off the product, drip dry the equipment allowing the product to thoroughly dry out before next use.

Ensure that NO alterations to the product are made.

Ensure that the following cleaning methods are NOT used: water over 40° C, bleach, any detergent not suitable for bare skin, wire brushes or other scouring agents, jet wash or other power products, radiators or other direct heat sources, ensure that a thorough visual and tactile examination of the product is made after cleaning, before the item is allowed to be re-used.

Rope

Material: Made from 12mm Polyamide 3-strand twisted rope.

Diameter: 12 mm

Breaking strength: 24 kN

CHARACTERISTICS

Rope ends spliced and covered with polyethylene protective sleeve.

Abrasion resistant thimbles provided within loops.

2 screw gate connectors in alloy steel. Gate opening 18 mm. Conforms to EN362:2004 class B & M.

Connectors provided at both ends for attachment.

CONFORMITY

EN 354: 2010

The lifespan of the product is 10 years from the date of manufacture subject to passing necessary checks and inspection by a competent person.

Static strength: 22 kN for 3 Minutes.

Dynamic strength: Free fall from 4 m height with a test mass of 100 kgs.