SAFATEX RA

ATEX Right Angle LED 325 Lumen Flashlight. Zone 0 and mining approved.



The NightSearcher SAFATEX RA is part of the NightSearcher SAFATEX ATEX portable range of LED lighting. It is UL, IECEx and ATEX certified as well as CE, ROHS and REACH accredited. It is approved for use in mines and certified to ATEX Zone 0 for gas.

The SAFATEX RA is a tough, versatile, compact flashlight with dual light output of either 325 or 184 lumens from a CREE XP-G2 high output LED.

Switching light modes is via a push button switch, mounted on the front of the flashlight for ease of use even when worn with a BA set and/or wearing thick gloves. The first press switches on the high setting providing a 288m beam, a second press the lower setting with a 184m beam, a third press turns of the flashlight.



KEY FEATURES AT A GLANCE:


NightSear SAFATEX


- ATEX Approved to Zone 0 and for use in mines
- 325 lumen providing a 288 metre beam or 184 lumen with 184 metre beam
- CREE[®] XG2 High Output LED
- Front mounted on/off/mode switch, ideal for use with BA set and thick gloves
- Powered by 4 No. 1.5V AA type batteries (not supplied)
- Runtime of up to 13 hours
- Battery compartment accessible only by use of a tool (supplied)
- Safety gas release valve
- Chemical and corrosion resistant non conductive polycarbonate housing
- Supplied with clip for attachment to loops, pockets, belts & BA sets
- 183mm x 69mm x 63mm. 250g net weight, 319g with batteries.
- IP54 Rated

Certification and Standards ATEX Certification Ex: | M1 Ex ia | Ma Ex: || 1G Ex ia ||C T4 Ga SIRA 15ATEX2166X

IECEx Certification Mining: Ex ia Ma Gas: Ex ia IIC T4 Ga IECEx SIR 15.0062X

UL Certification Class I DIV 1&2 Groups A B C D Class II DIV 1&2 Groups E F G Class III Temp Code: T4 IP54 File Number E261379 183mm



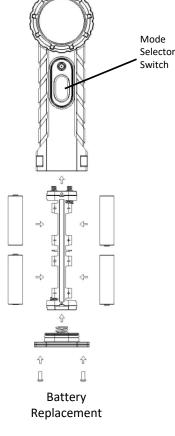

PRODUCT CODE: NSSAFA-RAFLA

Register your purchase on the NightSearcher website to upgrade your warranty from 3 to 5 years, free of charge. www.nightsearcher.co.uk

