

THE BIG RANGE™

BLUE - EAR DEFENDER

TECHNICAL
SPECIFICATION

PRODUCT CODE: AEA060-040-500

QUALITY EAR DEFENDERS SUITABLE FOR USE IN MEDIUM DUTY INDUSTRIAL & OUTDOOR APPLICATIONS

HEARING PROTECTION

INSTRUCTIONS FOR USE

Pull the earshells to the maximum extent of the headband

Fit the cups over the ears, with the marking "TOP" above the ear

Slide headband down until it touches the top of the head

PVC COVERED OPEN CELL
FOAM HEAD BAND COVER

PVC COVERED
FOAM PADS

POLYPROPYLENE
HEAD BAND

ABS CUPS

OPEN CELL FOAM INSERTS:

Foam Inserts provide extra
comfort when in use

DIMENSIONS OF EAR DEFENDERS

Length: 183mm

Width: 165mm

Height: 97mm

Weight: 224g (Approx.)

Ear Defender Cup Open Area: 44mm x 70mm

CONFORMITY

Conforms to EN 352-1

EU Type Examination Certificate Number 676978

CLEANING & MAINTENANCE

The ear defenders may be cleaned with soap and warm water and dried with a soft cloth

The ear defenders should not be cleaned with chemical or abrasive cleaners

Store out of direct sunlight, away from chemicals and not exposed to extremes of temperature

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jspsafety.com.

THE BIG RANGE™

BLUE - EAR DEFENDER

TECHNICAL
SPECIFICATION

PRODUCT CODE: AEA060-040-500

QUALITY EAR DEFENDERS SUITABLE FOR USE IN MEDIUM DUTY INDUSTRIAL & OUTDOOR APPLICATIONS

HEARING PROTECTION


PERFORMANCE

Frequency (Hz)	63	125	250	500	1000	2000	4000	8000
Mean Attenuation (dB)	16.6	14.8	17.0	25.2	34.0	32.5	38.3	33.8
Standard Deviation (dB)	5.2	3.1	1.9	3.8	3.0	4.9	3.5	5.5
Assumed Protection (dB)	11.4	11.7	15.1	21.4	31.0	27.6	34.8	28.3
	H=30		M=24		L=17		SNR=27	

DIMENSIONS OF OUTER PACKAGING

Quantity: 40

Weight: 10.8kg (Approx.)

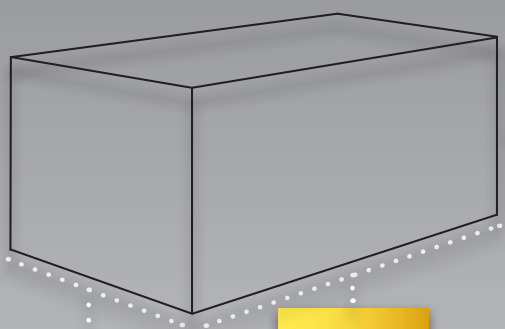

HEIGHT:
450mm

WIDTH:
430mm

LENGTH:
585mm

LIMITATIONS OF USE

Protection will only be offered if the ear defender is fitted correctly

Ear pads may deteriorate with use and should be examined at frequent intervals

The pads are available as a spare part

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The ear pads, when in contact with the skin may cause allergic reactions to susceptible individuals

If this occurs leave the hazard area, remove the ear defender and seek medical advice

If the ear defender is to be worn for long periods the noise level must be reduced to 80dB

Before selection of a suitable ear defender a noise survey should be carried out

Spectacle frames and hair between the ear pads and the head may affect the performance of the ear defender

Hearing Protection should be used in accordance with the European Physical Agents (Noise) Directive 2003/10/EC



DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jspsafety.com.